


# An assessment of the economic effects of drought in the Hirmand basin in the east of Iran: The application of the decision support system (DSS) approach

Ali Sardar Shahraki<sup>1</sup>, Mahmood Mohammad Ghasemi<sup>\*2</sup>

<sup>1</sup>Department of Agriculture Economics, Faculty of Management and Economics, University of Sistan and Baluchestan, Zahedan, Iran.

<sup>2</sup>Department of Economic, Social and Extension Research, Sistan Agricultural and Natural Resources Research and Education Center, AREEO, Zabol, Iran.

## GRAPHICAL ABSTRACT

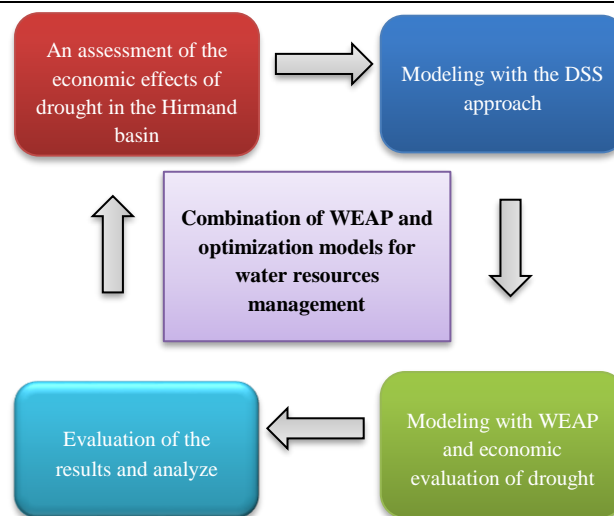

## ARTICLE INFO

### Article history:

Received 9 January 2023

Reviewed 12 March 2023

Received in revised form 13 April 2023

Accepted 14 April 2023

Available online 16 April 2023

### Keywords:

Decision support system (DSS)

Drought

Economic modeling

Hirmand basin

Sistan development

WEAP model

**Article type:** Research Article



© The Author(s)

Publisher: Razi University

## ABSTRACT

The issue of water resource management has become extremely complicated due to the droughts of the last two decades and the competition among the drinking sector, agricultural sector, and international Hamoun wetland to use water. To analyze the status and help managers in policy analysis and decision-making, this research adopted an integrated water resource model (WEAP) with a decision support system (DSS) approach to study the effect of drought on rural and agricultural development and its economic impacts in the region. So, the Iranian government's water development projects were simulated within 11 scenarios for a medium-term period (up to the 2030 horizon) and the implications of their implementation for the development of the rural and agricultural sectors were assessed. According to the results, if Afghanistan observes Iran's water rights, there will still be a great amount of unmet water demand (314.53 million m<sup>3</sup>) for the agricultural and wetland sectors. However, if this scenario is realized, the unmet demand will decrease by about 196 million m<sup>3</sup> versus the status quo and the agricultural sector's profit will increase by about 314 billion IRR, which will be very helpful for rural development. So, relevant officials should put their best effort into realizing the water right. It is suggested to strengthen water diplomacy between the two main stakeholders in the region in order to reduce the persistence of drought.

## 1. Introduction

In the new global view, water is regarded as a socio-economic commodity that is a basic human need (Ghafari Moghadam et al. 2022;

Karimi and Mousavi. 2021; Kiani Ghalehsard et al. 2021; Moslemi et al. 2021; Farajzadeh et al. 2014; Karamouz et al. 2008). However, a long-term goal of strategic water management in Iran is to establish a balance between water demand and existing water resources

<sup>\*</sup>Corresponding author Email: [M.Mghasemi@areeo.ac.ir](mailto:M.Mghasemi@areeo.ac.ir)

(Saeidinia et al. 2012; Ghafari Moghadam et al. 2021; Bagheri Harouni and Saeed. 2013). Water resources are relatively fixed in the world, the aggravating water crisis can be attributed to the increasing population growth, unbalanced distribution of surface and underground water resources (Anonymous. 2010; WEDC. 2014; Bouwer. 2000; Yazdanpanah et al. 2008; Sandoval et al. 2008). The involvement of numerous consumers with different utilities and priorities in the issues related to the management and planning of water resources brings about remarkable conflicts and stress regarding water resources, provoking concerns of managers and planners (Madani & Lund. 2010; Purkey et al. 2008; Alfarrar et al. 2012).

One of the most important basins in Iran is the extraterritorial basin of Hirmand, which is shared by Iran and Afghanistan and plays a key role in the life of the Sistan region where people's livelihood severely depends on the Hirmand River. The Sistan plain has an arid and hyper-arid climate and its economy, agriculture, employment, environment, and rural development have been damaged by extremely low rainfall (an average of 50 mm/year, i.e., about one-fifth of the mean annual precipitation of Iran) and extremely high evaporation (4000-5000 mm/year, i.e., about 2.5 times larger than Iran's average) (Sardar Shahraki et al. 2023; Ghafari Moghadam et al. 2022; Khairi et al. 2022; Yaqob et al. 2015). This research aims to simulate and evaluate the effects of water management scenarios on the supply of the present and future water needs of different sectors in the Hirmand basin under an integrated water resource management model and to evaluate the economic effects of these scenarios on the development of the agricultural sector. Fig. 1 displays the Hirmand basin.

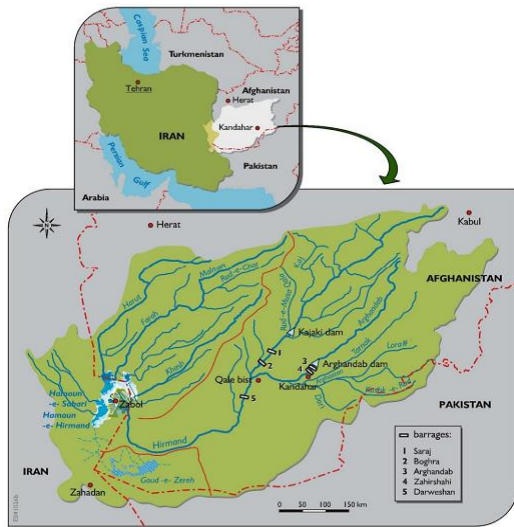


Fig. 1. Map of the study area.

In this respect, various models have been developed. For example, water evaluation and planning system (WEAP), WBALMO, AQUATOOL, WATER WARE, and WARGI-SIM, are the models that are used in the management of water resources with the simulation approach (Hollermann et al. 2010; Condom et al. 2011; Choi et al. 2010; Mounir et al. 2011; Mutiga et al. 2010; Vonk et al. 2014).

In the present study, the WEAP model was selected and used to simulate water resource management in the Sistan region. The distinction of the present study from similar works is the economic assessment of the simulated scenarios in a certain basin and the determination of its impacts on rural and agricultural development, which have not been studied so far. The application of the WEAP model can help to simulate and optimize in this area to advance water resource management scenarios. This area has a complex water system that has been investigated in this research with all dimensions in the WEAP model.

2. Materials and methods

WEAP (Water Evaluation and Planning System) was developed by Stockholm Environment Institute's U.S. Center. This method makes calculations by considering a demand location where simplified hydrological and agro-hydrological processes like precipitation, evapotranspiration, and plant growth happen and by emphasizing precipitation and agricultural irrigation. The calculations are made by the following equations in which LC represents the land cover, HU represents the hydrological unit, I represents irrigated, and NI

represents non-irrigated (Sieber et al. 2005; Dimovaa et al. 2014; Vonk et al. 2014). Consequently, the actual yield can be calculated by:

$$PrecipAvailableForET_{LC} = Precip_{HU} \times Area_{LC} \times 10^{-5} \times PrecipEffective_{LC} \quad (1)$$

$$ET_{potential}_{LC} = ET_{reference}_{HU} \times Kc_{LC} \times Area_{LC} \times 10^{-5} \quad (2)$$

$$PrecipShortfall_{LC,I} = Max(0, ET_{potential}_{LC,I} - PrecipAvailableForET_{LC,I}) \quad (3)$$

$$SupplyRequirement_{LC,I} = (1 / IrrFrac_{LC,I}) \times PrecipShortfall_{LC,I} \quad (4)$$

$$SupplyRequirement_{HU} = \sum_{LC,I} SupplyRequirement_{LC,I} \quad (5)$$

The last four equations are used to calculate extra water (i.e., above the available precipitation), which is required to meet the water requirement of evapotranspiration related to the land cover and the whole hydrological unit while considering irrigation efficiency.

$$Supply_{HU} = Calculated \text{ by WEAP allocation algorithm} \quad (6)$$

$$Supply_{LC,I} = Supply_{HU} \times \left( \frac{SupplyRequirement_{LC,I}}{SupplyRequirement_{HU}} \right) \quad (7)$$

$$ET_{Actual}_{LC,NI} = Min \left( ET_{potential}_{LC,NI}, PrecipAvailableForET_{LC,NI} \right) \quad (8)$$

$$ET_{Actual}_{LC,I} = Min(ET_{potential}_{LC,I}, PrecipAvailableForET_{LC,I} + IrrFrac_{LC,I} \times Supply_{LC,I}) \quad (9)$$

$$EF_{LC} = ET_{Actual}_{LC} / ET_{potential}_{LC} \quad (10)$$

where, Area is the land cover area (ha), Precip is the precipitation (mm), PrecipEffective is the effective precipitation (%), i.e., the percentage of the irrigation that can be used for evapotranspiration, PrecipAvailableForET is the available precipitation for evapotranspiration, Kc is the crop coefficient provided by FAO, ETreference is the evapotranspiration of the reference crop, PrecipShortfall is the evapotranspiration shortage (if only taking precipitation into account), IrrFrac is the percentage of supplied water that is available for evapotranspiration, SupplyRequirement is the crop irrigation requirements, Supply is the amount of water supplied for irrigation, EF is the satisfied fraction of the potential evapotranspiration, Yield ResponseFactor is the factor representing yield variations when potential evapotranspiration is lower than actual evapotranspiration, PotentialYield is the maximum potential yield assuming the availability of all proper water resources, ActualYield is the actual yield assuming the available evapotranspiration, Runoff is the runoff resulting from land cover, RunoffToGW is the runoff that is converted into groundwater, and RunoffToSurfaceWater is the runoff that is converted to surface water.

WEAP is based on the basic equations of water balance according to which the water demands of the agricultural, drinking, and environmental sectors are modeled in the Sistan region. In the present research, the WEAP approach is implemented in several steps as follows:

- Step 1. Developing a temporal and spatial framework, system components, and problem status in the Hirmand basin.
- Step 2. Calculating and analyzing water demands of the agricultural, drinking, and environmental sectors, water rights and allocation priorities, surface water simulation, the use of reservoirs, ecosystem demands, and system vulnerability in the Hirmand basin. The results provide an image of the actual water requirements, resources, and system supply in the Hirmand basin. In this step, the key assumptions are defined regarding policies, costs, and the factors that influence water demand and supply.
- Step 3. Defining managerial scenarios for the optimal use of regional water resources as per the regional conditions, managers, stakeholders, and officials' opinions, and the policies of the Ministry of Energy. In this research, 11 water management scenarios have been developed.
- Step 4. Analyzing the impact of different scenarios on the basin water use in the future and the rural and agricultural development considering

the available water and water conditions in the Sistan region. The optimal model for each scenario is estimated by:

$$Max \quad \tilde{\beta}_j = \sum_{j=1}^n \sum_{i=1}^m P_{cpji} \cdot Ya_{ji} \cdot AF_{ij} - \sum_{j=1}^n \sum_{i=1}^m \sum_{k=1}^q P_{cojik} \cdot X_{jik} \cdot AF_{ij} \tag{11}$$

Subject to:

$$P_{cp}, Ya, AF, P_{co}, X \in WEAP \text{ Model}$$

$$P_{cp}, Ya, AF, P_{co}, X \geq 0$$

where,  $P_{cpji}$  represents the price of the  $i$ th crop in the  $j$ th region (the main products in the agricultural sector are wheat and barley, summer vegetables and grapes),  $Ya_{ji}$  represents the yield of the  $i$ th crop in the  $j$ th region,  $AF_{ij}$  represents the cultivation area of the  $i$ th crop in the  $j$ th region,  $P_{cojik}$  represents the price of the  $k$ th input for the  $i$ th crop in the  $j$ th region, and  $X_{jik}$  represents the amount of the  $k$ th input for the  $i$ th crop in the  $j$ th region.

The water management scenarios defined in this research are as follows:

Scenario 1: This is the reference scenario, which is the status quo with previous management. It is the basis for the comparison of other scenarios. In other words, if the basin is managed under the present conditions and previous policies, how will the Hirmand basin be by 2030?

Scenario 2: The direct transfer of water from Chahnimeh reservoirs to the lands of Agri.

Scenario 3: The direct transfer of water from Chahnimeh reservoirs to the lands of Agri2.

Scenario 4: The direct transfer of water from Chahnimeh reservoirs to the lands of Agri3.

Scenario 5: The second water-transfer pipeline to the city of Zahedan.

Scenario 6: A 30% reduction in the evaporation from the reservoir using 40% physical coverage.

Scenario 7: A 50% reduction in the evaporation from the reservoir using 50% physical coverage. Scenarios 6 and 7 are based on Zare Mahzabieh's (2021) empirical study on the methods to reduce surface evaporation from the Chahnimeh reservoirs.

Scenario 8: Changing resource allocation priorities.

Scenario 9: Afghanistan's respect for Iran's water rights.

Scenario 10: A combination of Scenarios 7 and 9 (water-saving scenarios).

Scenario 11: A combination of Scenarios 2, 3, 4, and 5 (no water-saving scenarios).

Table 1 presents the sites of water supply and demand with symbols. The Sistan region has three agricultural sectors, seven drinking sectors (six urban and 1 rural sector), and the Hāmūn wetland sector.

### 3. Results and discussion

Table 2 presents the mean water demand of different sectors over 2015-2030. The highest demand is related to Agr2 and the lowest to City6. In the reference scenario (SC1), the shares of the agricultural, drinking, and wetland sectors in the total demand are 91%, 4%, and 5%, respectively. According to the scenarios defined, the water demands of different sectors change only in SC5 and SC11 for the City1 sector.

Table 3 presents the mean unmet demand and the percentage of water supply for different sectors under different scenarios over 2015-2030. In SC1, the unmet demand of Agr1, Agr2, and Agr3, on average, amounts to 189.04, 207.69, and 79.4 million m<sup>3</sup>, respectively. The lowest amount of unmet demand is for Agr1 under SC2 whose unmet demand shows a reduction of nearly 138 million m<sup>3</sup> versus the reference scenario. Similar results were obtained for Agr2 in SC10 (135 million m<sup>3</sup>) and Agr3 in SC4 (79 million m<sup>3</sup>). When SC5 is implemented, the amounts of Agr2 and Agr1's unmet demand will increase versus the reference scenario, but Agr3's unmet demand will not change. The amount of unmet demand was estimated at 79.4 million m<sup>3</sup> for Agr3 in seven scenarios (SC1, SC2, SC3, SC5, SC6, SC7, and SC8), which is related to the fact that the water demand of this sector is supplied by the Paryan river, so different scenarios have no impact on its demand. Only in SC4, the water requirement of this sector is supplied from the Chahnimeh reservoirs in addition to the Paryan river, so its whole water demand is satisfied leaving no unmet demand. Wastage reduction management (SC6) will have a significant effect on the reduction of

Agr2 and Lake's unmet demand. According to the WEAP model's results, the unmet demands of these two sectors in this scenario will decrease by 120.99 and 12.68 million m<sup>3</sup> versus the reference scenario, respectively. This scenario will have a trivial effect on the Agr1 and Agr2 sectors. In SC7, the unmet demands of Agr2 and Lake will decrease by 125.577 and 13.36 million m<sup>3</sup> versus the reference scenario. Owing to the significance of supplying drinking water in the Sistan region, the amount of unmet demand of this sector is zero in most scenarios (except for SC8 and SC11). SC8 aims to change priorities in water allocation (given that the priority of water allocation in this region is drinking, agriculture, and wetland, respectively).

**Table 1.** The characteristics of the water supply and demand sites in the Sistan region.

Sub-basin	Specifications
Reservoir <sub>1</sub>	The water of the Sistan river flows into this reservoir. Its total volume is 660 MCM <sup>*</sup> and its inactive part is 320 MCM. The reservoir is the main source of water for the agricultural, drinking, and wetland sectors
Sistan and Paryan river	The Hirmand river is divided into two branches of Sistan and Paryan at Iran's borderline. The Sistan river first flows in Reservoir <sub>1</sub> and its surplus is transferred to Agr <sub>1</sub> and Agr <sub>2</sub> . This river finally flows into the Hāmūn wetland. The Paryan supplies the water requirement of Agr <sub>3</sub> .
Reservoir <sub>2</sub>	It receives the surplus water of Reservoir <sub>1</sub> . Its total volume is 820 MCM and its inactive volume is 200 MCM.
City <sub>1</sub> (Zahedan)	It has a population of 600,000 people and an annual water consumption rate of 55.56 m <sup>3</sup> /person/year.
City <sub>2</sub> (Zabol)	It has a population of 142,000 people and an annual water consumption rate of 58.02 m <sup>3</sup> /person/year.
City <sub>3</sub> (Zahak)	It has a population of 14,000 people and an annual water consumption rate of 53.34 m <sup>3</sup> /person/year.
City <sub>4</sub> (Hamoon)	It has a population of 6700 people and an annual water consumption rate of 57.37 m <sup>3</sup> /person/year.
City <sub>5</sub> (Hirmand)	It has a population of 7200 people and an annual water consumption rate of 47.97 m <sup>3</sup> /person/year.
City <sub>6</sub> (Nimrooz)	It has a population of 3300 people and an annual water consumption rate of 46.01 m <sup>3</sup> /person/year.
Rural	It has a population of 266,000 people and an annual water consumption rate of 54.75 m <sup>3</sup> /person/year.
Agri <sub>1</sub> (Zabol agriculture)	It has a cultivation area of 49,000 ha with a water consumption rate <sup>†</sup> of 8750 m <sup>3</sup> /ha.
Agri <sub>2</sub> (Zahak agriculture)	It has a cultivation area of 54,000 ha with a water consumption rate of 8450 m <sup>3</sup> /ha.
Agri <sub>3</sub> (Miyankangi agriculture)	It has a cultivation area of 32,000 ha with a water consumption rate of 7950 m <sup>3</sup> /ha.
Lake	The Hāmūn wetland has an area of 400,000 ha with water right <sup>‡</sup> of 60 million m <sup>3</sup> .

\* million m<sup>3</sup>; † calculated based on the regional crop pattern‡ This water right has been approved for 2500 ha of the wetland area.

Table 4 presents the results of the economic assessment of the scenarios. The effect of the individual scenarios on the cultivation area in the three agricultural sub-sectors was obtained by the WEAP model. According to the results, Agr1 will have the highest cultivation area in SC2. In this scenario, the cultivation area will increase by about 15800 ha versus the present conditions. The highest cultivation area of Agr2 will happen in SC10, showing an about 15500 ha increase compared to the present conditions. Agr3 will have its highest cultivation area in SC4, about 9000 ha greater than the present conditions.

**Table 2.** The water demand in different scenarios averaged for the years 2015-2030 (million m<sup>3</sup>).

Scenario no.	Agr <sub>1</sub>	Agr <sub>2</sub>	Agr <sub>3</sub>	City <sub>1</sub>	City <sub>2</sub>	City <sub>3</sub>	City <sub>4</sub>	City <sub>5</sub>	City <sub>6</sub>	Rural	Lake
SC <sub>1</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>2</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>3</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>4</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>5</sub>	428.75	471.56	279.44	41	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>6</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>7</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>8</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>9</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>10</sub>	428.75	471.56	279.44	26	9.28	0.86	0.42	0.39	0.17	14.43	60
SC <sub>11</sub>	428.75	471.56	279.44	41	9.28	0.86	0.42	0.39	0.17	14.43	60

**Table 3.** The amount of unmet demand and the percentage of water supply in different scenarios averaged over 2015-2030.

Scenario no.	Agr <sub>1</sub>		Agr <sub>2</sub>		Agr <sub>3</sub>		City <sub>1</sub>		City <sub>2</sub>		City <sub>3</sub>		City <sub>4</sub>		City <sub>5</sub>		City <sub>6</sub>		Rural		Lake			
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B		
SC <sub>1</sub>	189.04	55.91	207.69	55.96	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	34.86	41.9
SC <sub>2</sub>	50.7	88.17	320.87	31.96	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	55.31	7.82
SC <sub>3</sub>	195.15	54.48	78.6	83.33	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	52.69	12.18
SC <sub>4</sub>	205.2	52.14	250.97	46.78	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	44.66	25.57
SC <sub>5</sub>	191.35	55.37	210.22	55.42	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	36.02	39.97
SC <sub>6</sub>	185.56	56.72	87.7	81.4	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	22.18	63.03
SC <sub>7</sub>	180.12	57.99	82.12	82.59	79.4	71.59	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	21.5	64.17
SC <sub>8</sub>	175.2	59.14	195.1	58.63	79.4	71.59	13.03	49.88	5.71	38.47	0.62	27.91	0.23	45.24	0.27	30.77	0.11	35.29	6.92	52.4	35.2	41.33		
SC <sub>9</sub>	110.21	74.3	121.01	74.34	63.59	77.24	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	19.72	67.13
SC <sub>10</sub>	105.23	75.46	72.32	843.66	63.59	77.24	0	100	0	100	0	100	0	100	0	100	0	100	0	100	0	100	19.01	68.32
SC <sub>11</sub>	155.07	63.83	176.2	62.63	59.55	78.69	21.8	24.83	7.6	18.1	0.7	18.6	0.31	26.19	0.3	23.08	0.14	17.65	13.1	9.22	58.2	3		

A: Unmet demand (million m<sup>3</sup>); B = Met demand (%)

**Table 4.** The economic assessment of managerial scenarios for water resources in the Sistan region.

Scenario no.	Agr <sub>1</sub>		Agr <sub>2</sub>		Agr <sub>3</sub>	
	Cultivation area (ha)	Profit (10 million IRR)	Cultivation area (ha)	Profit (10 million IRR)	Cultivation area (ha)	Profit (10 million IRR)
SC <sub>1</sub>	27395.43	41.74	30216.69	45.80	22907.53	33.11
SC <sub>2</sub>	43205.71	65.83	17256.04	26.16	22907.53	33.11
SC <sub>3</sub>	26697.14	40.68	44999.24	68.21	22907.53	33.11
SC <sub>4</sub>	25548.57	38.93	25260.54	38.29	32000	46.26
SC <sub>5</sub>	27131.43	41.34	29926.97	45.37	22907.53	33.11
SC <sub>6</sub>	27793.14	42.35	43957.16	66.63	22907.53	33.11
SC <sub>7</sub>	28414.86	43.30	44596.15	67.60	22907.53	33.11
SC <sub>8</sub>	28977.14	44.15	31658.41	47.99	22907.53	33.11
SC <sub>9</sub>	36404.57	55.47	40142.72	60.85	24718.01	35.73
SC <sub>10</sub>	36973.71	56.34	45718.38	69.3	24718.01	35.73
SC <sub>11</sub>	20726.26	31.12	33822.72	51.27	25180.65	36.4

**4. Conclusions**

Based on the results of the scenarios of evaporation reduction from the reservoirs, the unmet demand decreases by about 136 and 147 million m<sup>3</sup> in SC6 and SC7 versus the reference scenario, respectively. So, these two scenarios are appropriate for the region given its water status and droughts. However, their implementation will only expand the cultivation area of Agr2 and will have no impact on the agricultural development of the other two sub-sectors. If the policy priority is to develop agriculture in the region, the results of SC8 show that the water demand of the drinking sector will hardly be supplied so that 26.8 million m<sup>3</sup> will be left unmet. Since the Chahnimeh reservoirs are the only source of drinking water for about 1 million people living in the region, this scenario is a serious threat to the supply of drinking water for people. If the so-called 'Delta' agreement between Iran and Afghanistan is implemented and the Afghanistan state observes Iran's water rights, the water crisis will be resolved in the region. In SC9, although a significant part of the agricultural and wetland sectors' demand for water will not be satisfied, the unmet demand will decrease by about 196 million m<sup>3</sup> versus the reference scenario. So, the observance of Iran's water rights by Afghanistan needs Iranian officials' determination as it will greatly contribute to the agricultural and rural development in Sistan.

**Acknowledgement**

The authors appreciate sistan agricultural and natural resources research and education center and the regional water company of Sistan and Baluchestan for sharing the required information with them.

**References**

Alfarra A., Kemp-Benedict E., Hotzl H., Sader N., Sonneveld B., Modeling water supply and demand for effective water management allocation in the Jordan Valley, Journal of Agricultural Science and Applications (JASA) 1 (2012) 1-7

Anonymous., Water resources allocation guideline The Fifth Five-Year Development Plan of the Islamic Republic of Iran, Deputy of Strategic Planning and Surveillance (2010).

Bagheri Harouni M., Saeed H., Comparison of WEAP and MIKE basin models in water resources allocation (Case Study Tlavar river), Journal of Water and Soil Conservation 20 (2013) 151-167.

Bouwer H., Integrated water management Emerging issues and challenges, Journal of Agricultural Water Management 45 (2000) 217-228.

Choi S., Lee D.R., Moon J.W., Kang S.K., Application of K-WEAP (Korea-integrated water resources evaluation and planning model), Journal of Korea Water Resources Association 43 (2010) 625-633.

Condom T., Escobar M., Purkey D., Pouget J.C., Suarez W., Ramos C., Apaestegui J., Zapata M., Gomez J., Vergara W., Modeling the hydrologic role of glaciers within a Water Evaluation and Planning System (WEAP) a case study in the Rio Santa watershed (Peru), Hydrology and Earth System Sciences 8 (2011) 869-916.

Dimovaa G., Tzanova E., Ninovb P., Ribarova M., Complementary use of the WEAP model to underpin the development of SEEAW physical water use and supply tables, Procedia Engineering 70 (2014) 563 –572.

- Farajzadeh M., Madani Larjani K., Massah Bevani A., Davtatab R., Climate change effects on reliability of water delivery in downstream of Karkheh river basin and its adaptation strategies, *Journal of Water and Soil Resources Conservation* 3 (2014) 49-63.
- Ghafari Moghadam Z., Moradi E., Hashemi Tabar M., Sardar Shahraki A., An analysis of the water crisis under different scenarios in the agriculture sector of Sistan region: the approach of future studies, *Journal of Water Research in Agriculture* 35 (2021) 201-216.
- Ghaffari Moghadam Z., HashemiTabar M., Sardar Shahraki A., Economic model for optimal allocation of water resources with an emphasis on risk and consistency index in the Sistan region: The application of interval two-stage stochastic programming method, *Environmental Energy and Economic Research* 6 (2022) 1-13.
- Ghaffari Moghadam Z., Moradi E., Hashemi Tabar M., Sardar Shahraki A., Optimal allocation of water resources in the agricultural sector by using The Stackelberg-Nash-Cournot Model and emphasis on water market (Case study: Sistan plain pipe water transfer project), *Iranian Journal of Ecohydrology* 9 (2022) 273-289.
- Hollermann B., Giertz S., Diekkrüger B., Balancing future water availability and demand using the WEAP 'water evaluation and planning' system, *Water Resource Management* 24 (2022) 3591-3613.
- Karamouz M., Elyasi A., Ahmadinia S., Economic analysis of demand management policies in water resources development projects, A case study, *Journal of Civil Engineering Islamic Azad University* 1 (2008) 46-57.
- Karimi M., and Mousavi S., The allocation of basic priorities of water resources at the basin level: A comparison between MODSIM and WEAP, *Proceedings of 6th National Conference of Civil Engineering, Semnan University, Semnan, Iran.* (2021)
- Khairi M., Safdari M., Sardar Shahraki A., An Integrated Investigation into the socioeconomic factors threatening crop marketing: A comparative study on Faryab province of Afghanistan and the Sistan region of Iran, *Environmental Energy and Economic Research* 6 (2022) 1-20.
- Kiani Ghalehsard S., Shahraki J., Akbari A., Sardar Shahraki A., Assessment of the impacts of climate change and variability on water resources and use, food security, and economic welfare in Iran, *Environment Development and Sustainability* 23 (2021) 14666-14682.
- Madani K., and Lund J.R., The Sacramento-san Joaquin delta conflict, chicken or prisoner's dilemma? *Proceeding of the 2010 World Environmental And Water Resources Congress (ASCE)* (2010) 2513-2521.
- Moslemi B., Hashmitabar M., Sardar Shahraki A., Risk communication and acceptance of new inputs in agriculture, Case study of Saifi Karan of Kerman province, *Agricultural Economics Research* 13 (2021) 25-42.
- Mounir A.M., Ming Ma.C., Amadou I., Application of water evaluation and planning (WEAP) a model to assess future water demands in the Niger river (in niger republic), *Modern Applied Science* 5 (2011) 38-49.
- Mutiga J.K., Mavengano S.T., Zhongbo S., Woldai T., Becht R., Water allocation as a planning tool to minimize water use conflicts in the Upper Ewaso Ng'iro North Basin, Kenya, *Water Resource Management* 24 (2010) 3939-3959.
- Purkey D.R., Joice B., Vicuna S., Hanemann M.W., Dale L.L., Yates D., Dracup J.A., Robust analysis of future climate change impacts on water for agriculture and other sectors a case study in the Sacramento Valley, *Climatic Change* 87 (2008) 109-122.
- Saeidinia M., Samadi Boroujeni H., Maleki A., Izadi A., Evaluation of drought effect on the groundwater resource and agricultural development in the Beheshtabad basin using WEAP model, *Journal of Water and Soil Conservation* 18 (2012) 17-37.
- Sandoval-Solis S., McKinney D.C., Sanvicente-Sanchez H., Evaluation of water management scenarios for the Rio Grande/Bravo, *World Environmental and Water Resources Congress, ASCE* (2008) 1-286.
- Sardar Shahraki A.; Panagopoulos T.; Ashari H.E.; Bazrafshan O., Relationship between indigenous knowledge development in agriculture and the sustainability of water resources, *Sustainability* 15 (2023) 5665.
- Sieber J., Chris Swartz D., Huber-Lee A., WEAP (Water Evaluation and Planning System), user guide for WEAP21, *Stockholm Environment Institute U.S. Center. USA* (2005).
- Vonk E., Xu Y.P., Booij M.J., Zhang X., Augustijn D.C.M., Adapting multi reservoir operation to shifting patterns of water supply and demand a case study for the Xinanjiang-Fuchunjiang reservoir cascade, *Water Resource Management* 28 (2014) 625-643.
- Water engineering and development center (WEDC) report, *Civil and Building Engineering, Loughborough University* (2014).
- Yaqob Y., Al-Sa'Ed R., Sorial G., Sudian M., Simulation of transboundary wastewater resource management scenarios in the Wadi Zomer watershed using a WEAP model, *International Journal of Basic and Applied Sciences* 4 (2014) 27-35.
- Yazdanpanah T., Khodashenas S.R., Davari K., Ghahreman B., Basin water resource management using WEAP: The case of the Arghand basin, *Journal of Agricultural Science and Industries Water and Soil* 22 (2008) 213-222.
- Zare Mahzabieh H., An empirical study on the reduction of surface evaporation from Chahnimeh (M.Sc. Thesis), *Sistan-va-Baluchestan University Press: Zahedan, Iran,* (2021).